


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VELODYNE ACOUSTICS, INC., ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VELODYNE ACOUSTICS, INC., IS PROHIBITED.

REVISIONS HISTORY				
ECN	REV	DESCRIPTION	APPROVAL	DATE
1116	A	RELEASE TO PRODUCTION	SSN	08/27/15

- NOTES:
- THIS DIAGRAM IS TO ENABLE VLP-16 USERS TO BYPASS THE INTERFACE BOX AND WIRE DIRECTLY TO THE VLP-16.
 - WHEN INSTALLING UNIT WITHOUT INTERFACE BOX, THE POWER LINE (ITEM #2) MUST BE WIRED WITH AN IN-LINE 3A 32V FAST BLOW FUSE.
 - ITEM 5 AND 6 ARE FULL LENGTH TWISTED CABLE PAIR.
 - ITEM 7 AND 8 ARE FULL LENGTH TWISTED CABLE PAIR.

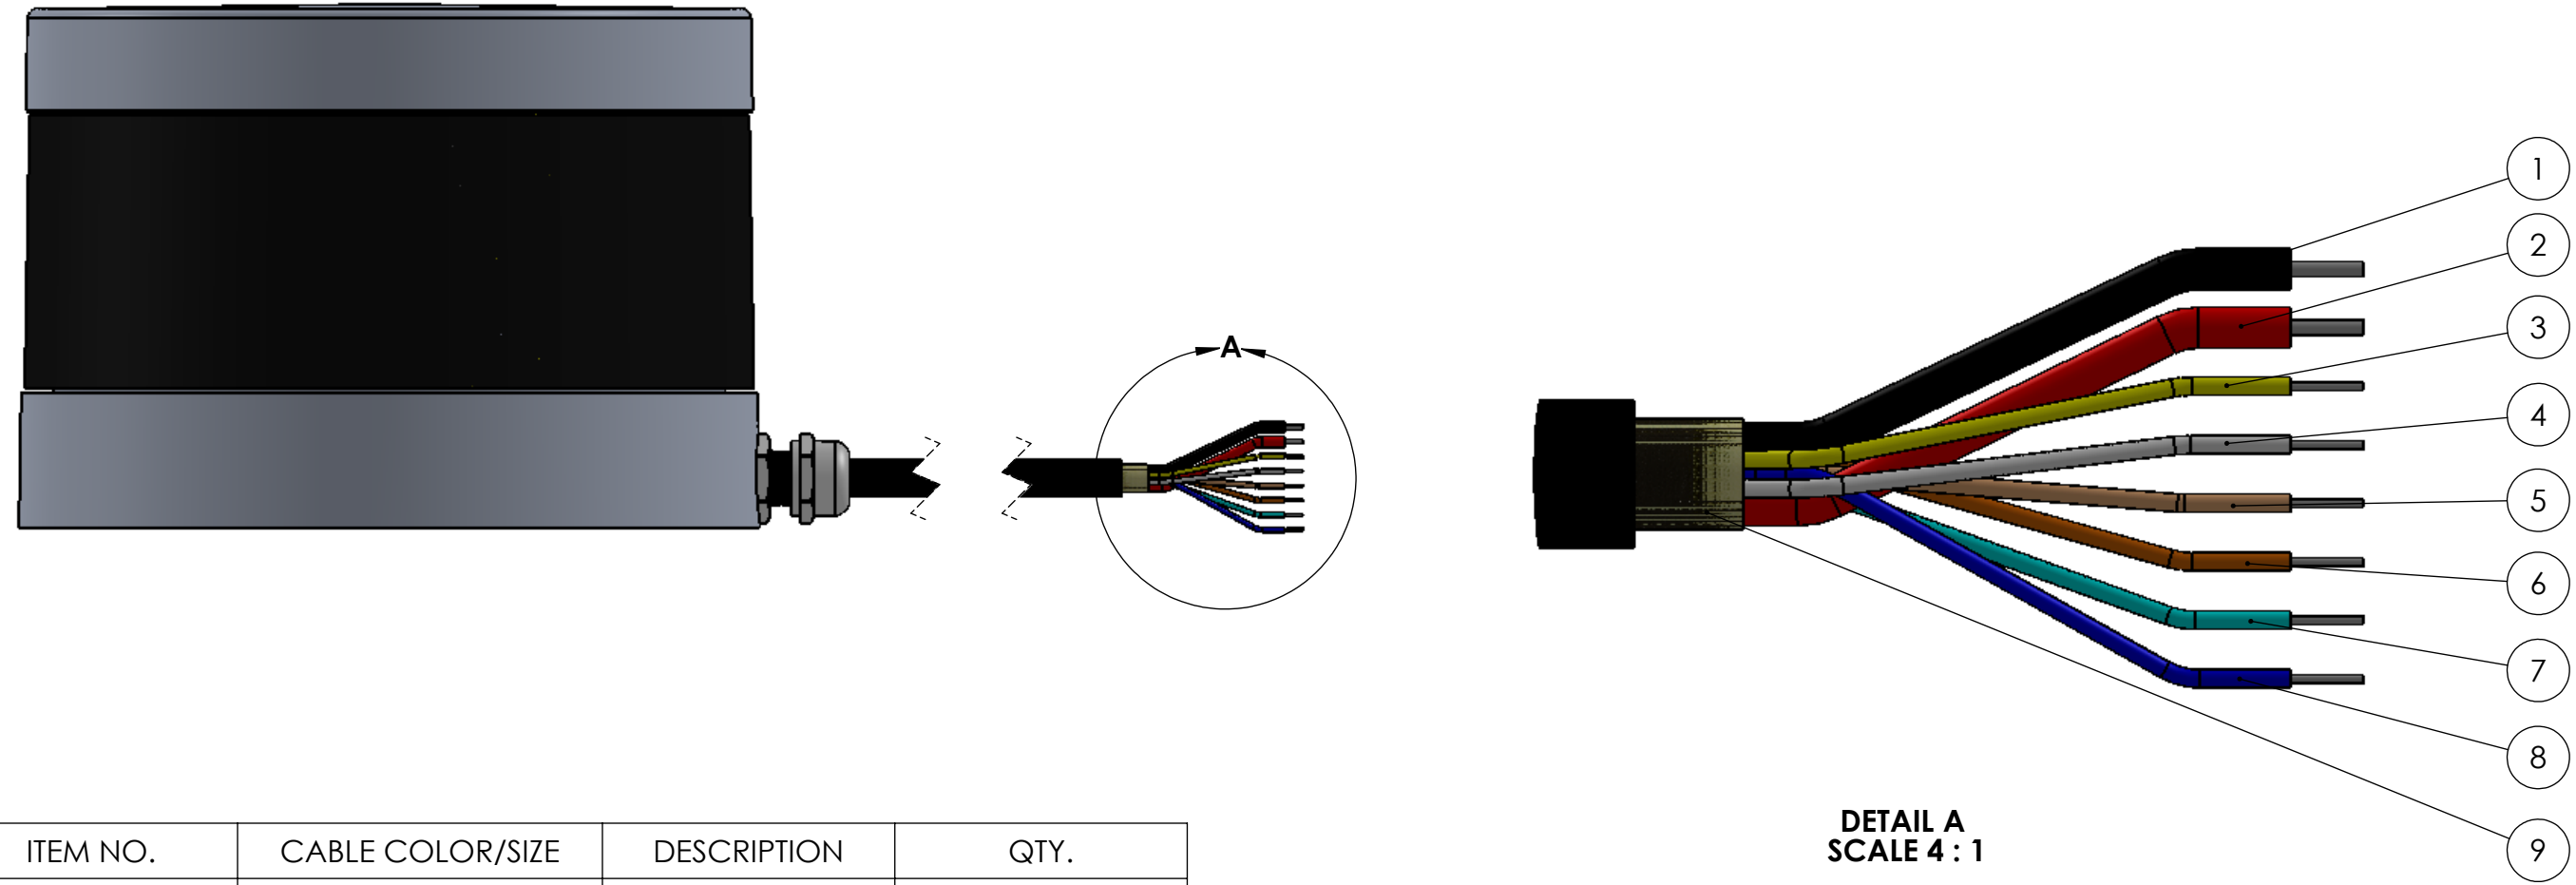

DETAIL A
SCALE 4 : 1

ITEM NO.	CABLE COLOR/SIZE	DESCRIPTION	QTY.
1	BLACK, 20 AWG	GROUND	1
2	RED, 20 AWG	+12V	1
3	YELLOW, 28 AWG	GPS PULSE	1
4	WHITE, 28 AWG	GPS REC	1
5	LT ORANGE, 28 AWG	ETHERNET TX+	1
6	ORANGE, 28 AWG	ETHERNET TX-	1
7	LT BLUE, 28 AWG	ETHERNET RX+	1
8	BLUE, 28 AWG	ETHERNET RX-	1
9	SHIELD	SHIELD/NC	1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN DECIMAL INCHES AND [METRIC].		SOLIDWORKS GENERATED DRAWING. DO NOT MANUALLY UPDATE		Velodyne Acoustics, Inc.	
TOLERANCES ARE: DECIMALS ANGLES .xx ± .01 [0.25] ± N/A .xxx ± .005 [0.127]		APPROVALS	DATE	TITLE	
MATERIAL BLACK ABS		DWN SSN	08/27/15	WIRING DIAGRAM VLP-16	
FINISH SEE NOTES		CHKD		SIZE	DWG. NO.
DO NOT SCALE DRAWING		ENG	2	B	86-0107
				SCALE: SC	REV. A
				SHEET 1 of 1	